


**6 3/4" PBL SLIDING SLEEVE BIG BORE  
TECHNICAL SHEET**

**6 3/4" O.D.**

SERIAL #	_____	*
A-TOOL O.D.	_____	6 3/4"
B-TOOL I.D. (DRIFT)	_____	2.24"
FLOW AREA THROUGH TOOL	_____	3.94 sq./in.
C-BOX CONNECTION	_____	4 1/2 IF
D-PIN CONNECTION	_____	4 1/2 IF
E-ACTIVATION DART:		
DIAMETER	_____	2.28"
MATERIAL	_____	STAINLESS
NUMBER OF DARTS TO ACTIVATE	_____	1
BALL SHEARING PRESSURE	_____	NA
F-DEACTIVATION BALL:		
DIAMETER	_____	NA
MATERIAL	_____	NA
NUMBER OF BALLS TO DEACTIVATE	_____	NA
G-SIZE OF PORT	_____	1.25"
NUMBER OF PORTS	_____	2
TFA WHEN TOOL IS OPEN	_____	2.454 sq./in.
NUMBER OF CYCLES	_____	UNLIMITED
OVERALL LENGTH	_____	5 ft
WEIGHT	_____	390 lbs
TENSILE STRENGTH	_____	3,100,000 lbs
TORSIONAL STRENGTH	_____	190,000 ft/lbs
MAKE UP TORQUE	_____	34,840 ft/lbs

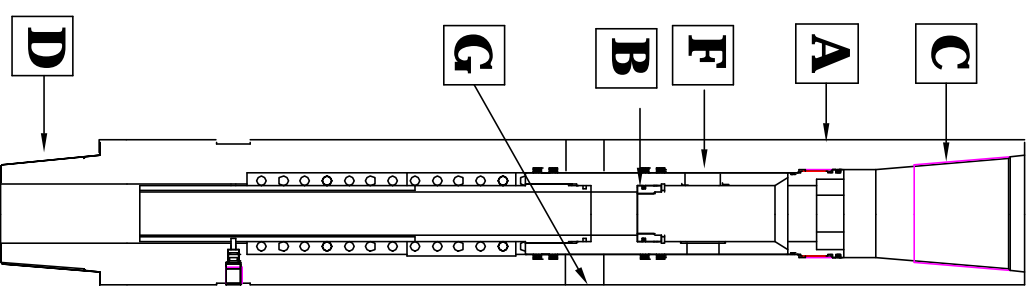

**NOTES:**

**NO DRIFT WHEN DART IS IN TOOL.**

\*Tools are rated to operate in temp. up to 420 degrees Fahrenheit.

\*2.01" Drift, 2.05" Dart & 2.09" Drift, 2.13" Dart also Available

\*